


PC card drilling dimensions(after plating)  
(thickness 2.40±0.20mm)

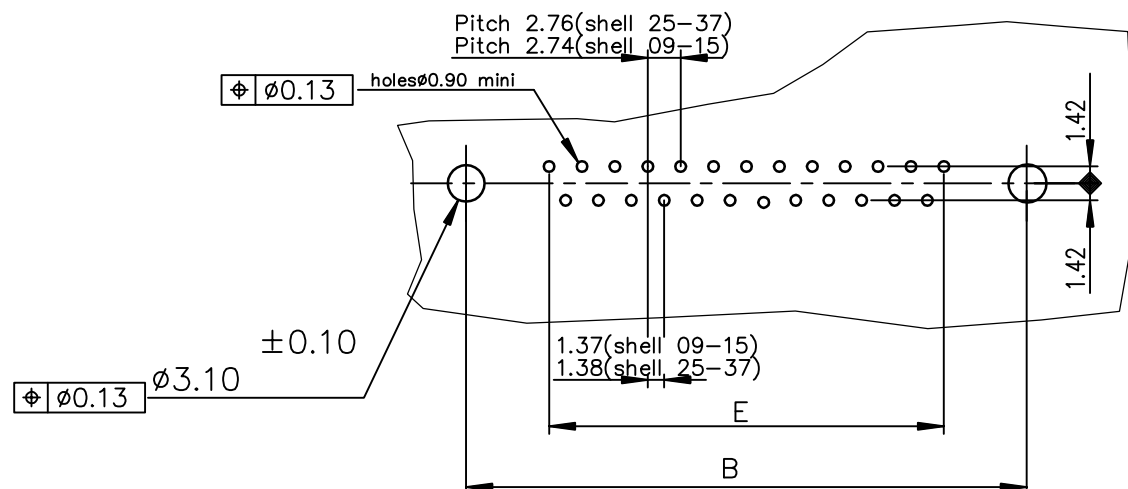

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PX00LF

Plating: 4 --> flash AU  
Plating: 6 --> 0.76µ AU

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6±0.15 mm.

mat'l. code				surface		tolerance		projection		product family	
-				ISO 1302 ✓		ISO 406 ISO 1101				D-SUB	
ltr				ecn no		dr		date		title	
E				ELX-I-22878		AB		2015/01/06		FEMALE CONNECTOR DELTA-D STRAIGHT - SOLDER TYPE FOR PCB 2.4mm	
				angles		linear				dwg no	
				0°±2'		.0±0.1 .00±0.1 .000±0.1		MM		sheet 1 of 1	
				dr		LELEON		1992/09/16		size	
				enr		ALIAS BABU		2015/01/06		A3	
				chr		MITHUN PAUL		2015/01/06		C01-8646-0122	
				app		BIJU K PAUL		2015/01/06		type	
				Product		Customer		Drawing			
sheet index		revision		E							
1		sheet		1							