

REV. 1
DCO 142226


TOL ± .010 UNLESS OTHERWISE SPECIFIED

| | |
|-----------------|---------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 1350 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.5 VDC |
| MUST RELEASE | 8.1 VDC MAX, 1.5 VDC MIN. |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 3000 CPS @ 30 g's |
| SHOCK | 75 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

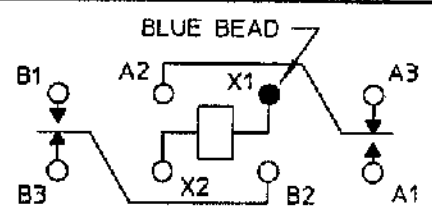

TERMINAL VIEW

| | |
|-----------------|-------------------------|
| CONTACT RATING: | LOW LEVEL TO |
| | 2 AMPS 28 VDC RESISTIVE |
| | 50,000 OPERATIONS |

DR. R.B. 9/10/97 CK. *S/2/00*



CUST. QPL
CUST. NO. M39016/13-072M REV.

3SBC RELAY

3SBC1537A2