


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	Black overmold, PVC
2	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	Black overmold, PVC
3	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 48P	1	Black

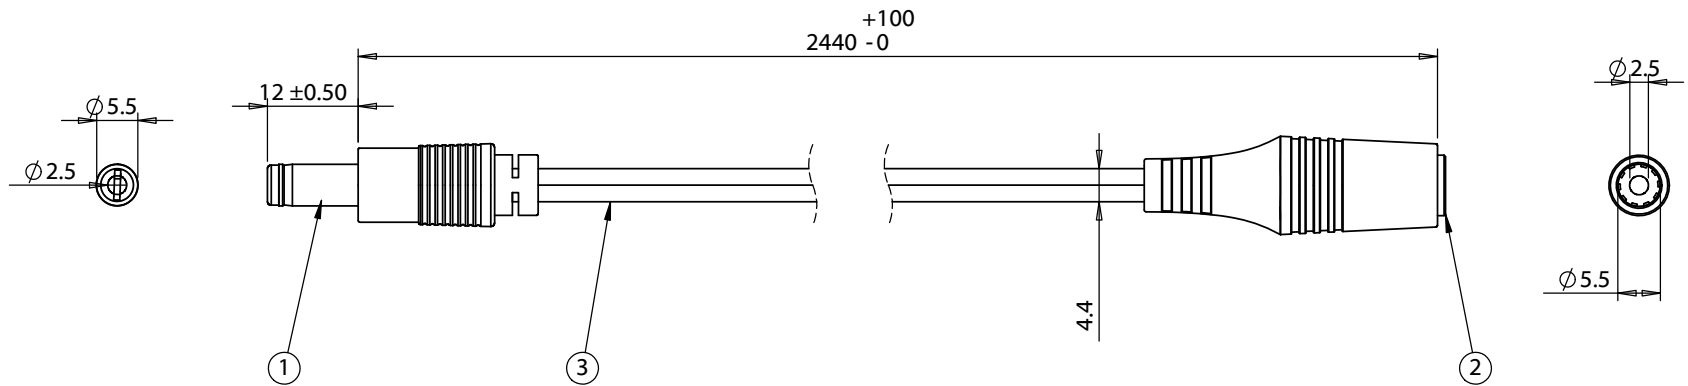

Wiring diagram		
50-00026	Wire	50-00027
Center	Stripe	Center
Sleeve	Black	Sleeve

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800877.670.7118 www.tensility.com</p>		
A	6/2/2014	Initial release	VERIFIED:	RoHS and REACH compliant Function test: no open, no reversed polarity, no short circuit, no INT			
			DIMENSIONS ARE IN MILLIMETERS	DESCRIPTION: Cable, 2440 mm, 5.5x2.5x12 mm, 50-00026 dc plug to 5.5x2.5 50-00027 dc jack, 18 AWG, 30-00007 wire	SIZE A	PART NUMBER 10-01750	
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

5

4

3

2

1