

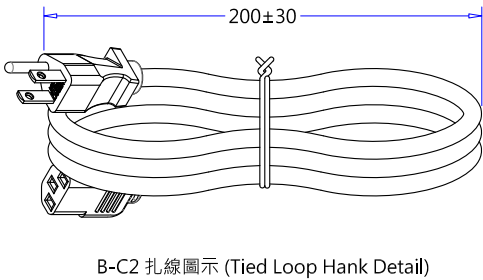
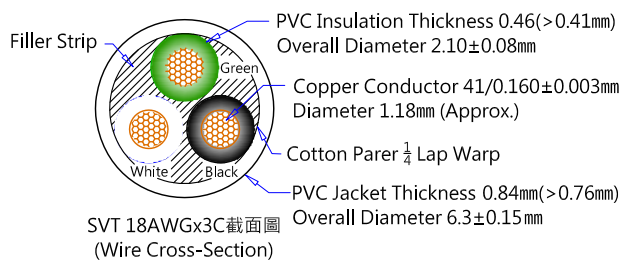



| 插頭部件 (Plug Component) | | | 頭部剝皮尺寸 (Dimensions) | | | 線材規格 (Wire Styles) | 尾部剝皮尺寸 (Dimensions) | | | 尾插部件 (Connector Component) | | |
|-----------------------|----------------------------------|------|-------------------------------|---------|------------|---|---------------------|-------------------------------|------------|--|------|---------------------|
| 顏色(Color) | 零件描述(Component) | Qty. | 內剝(Strip) | 外剝(ROJ) | 顏色(Color) | SVT 18AWGx3C 105°C 黑色 (BLACK) Length : 2000±50 (79"±2") | 外剝(R.O.J) | 內剝(Strip) | 顏色(Color) | 規格描述(Instruction) | Qty. | 顏色(Color) |
| 35P 黑色 (Black) | ME-301 (NEMA 5-15P) | 1 | 6 ⁺¹ ₋₀ | 22 ± 2 | 黑/Black(L) | | 16 ± 1 | 5 ⁺¹ ₋₀ | 黑/Black(L) | ME-302 (IEC 60320, C13) | 1 | 35P 黑色 (Black) |
| 鍍鎳 (Nickel-Plated) | φ4.75 圓管端子 (Earth Pins Terminal) | 1 | 6 ⁺¹ ₋₀ | 22 ± 2 | 白/White(N) | | 16 ± 1 | 5 ⁺¹ ₋₀ | 白/White(N) | 2.0*4.0 方管端子 (2.0*4.0 Receptacle Terminal) | 3 | 銅本色 (Brass-Natural) |
| 鍍鎳 (Nickel-Plated) | 6.3*1.5 單片圓頭端子 (Solid Blades) | 2 | 6 ⁺¹ ₋₀ | 22 ± 2 | 綠/Green(E) | | 16 ± 1 | 5 ⁺¹ ₋₀ | 綠/Green(E) | GA005-5 兩件式內模 (2.0*4.0 Serial Housing) | 1 | 米白色 (Off-White) |
| 黑色 (Black) | 301-1 兩件式內模 (301-1 Inner Body) | 1 | | | | | | | | | | |

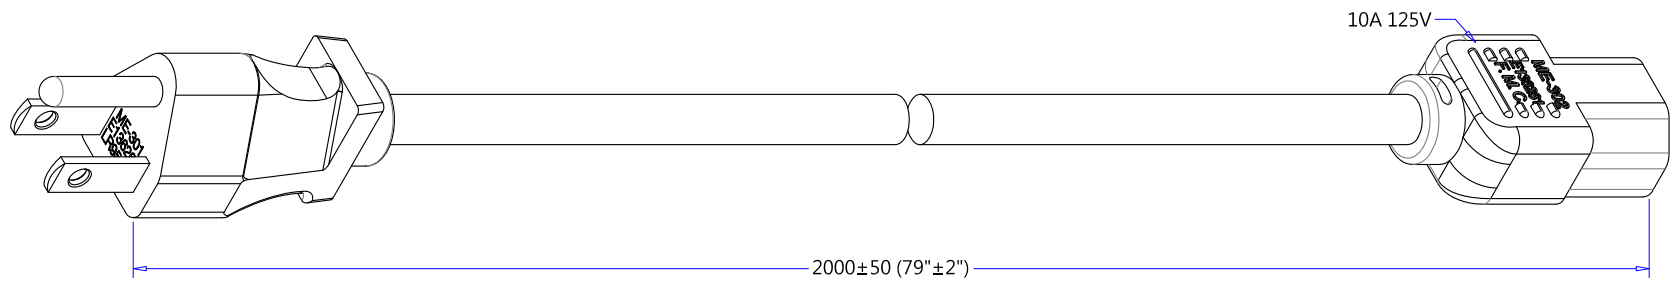

| REV | DATE | REVISE CONTENT | NOTE: |
|-----|------------|--|---|
| A | 08/29-2012 | The first edition is issued and drawing. | 1. Hi-Pot Test : 1500V/1Sec ; <0.5mA. 2. Insulation Resistance Test : DC 500/min> 100 meg-ohm. 3. Continuity & Polarization Test : No short circuit, break circuit, displacement. 4. Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening. 5. Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening. 6. All material according to Non-toxic standard.(Material must be RoHS compliant.) |

| 線材印字 (Wire Printed) | | 充麻, 油墨印字 (Fillers, Printing Ink) | | CnC Tech, LLC | | | |
|---------------------|-------------------------|---|---|---|-------------------|--------------------------|------|
| 包裝方式 (Packing) | | DRAWN | | Industrial Cable and Connector Technology | | | |
| Tied Hank | See Hank Detail | Chu8. | | CUSTOMER | | CnC | |
| Carton Size | 480 x 320 x 180 | DATE | | P/N No. | | 800-18-2-2-SVT0-BL-00200 | |
| Pack Number | 75pcs/ UL Laster Labels | 08/29-2012 | | MATERIAL | | PVC | UNIT |
| Carton Print | See Purchase Order | NEMA 5-15P to IEC 60320 C13 Power Supply Cord | | mm | | | |
| TYPE | | | | | Customer Approval | | |
| DRAWING NO. | 098MM979 | REV | A | | | | |

業務校閱： 品質校閱：